

XBA-USD6 Option Switch Settings


Supported bill USD 1, 5, 10, 20, 50, 100 6bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
	Reject USD 1	ON							
★	Accept USD 1	OFF							
	Reject USD 5		ON						
★	Accept USD 5		OFF						
	Reject USD 10			ON					
★	Accept USD 10			OFF					
	Reject USD 20				ON				
★	Accept USD 20				OFF				
	Reject USD 50 & 100					ON			
★	Accept USD 50 & 100					OFF			
	Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★	Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
	Stack Banknote when Power-up							ON	
★	Reject Banknote when Power-up							OFF	
	Reserved								ON
★	Reserved								OFF

This dip switch is located at the side of XBA.

Currency Assign Data

Interface Bill value	Pulse	NISR
BV1	\$ 1	\$ 1
BV2	\$ 5	
BV3	\$ 10	\$ 5
BV4	\$ 20	\$ 10
BV5	\$ 50	\$ 20
BV6	\$100	\$ 50
BV7		\$100

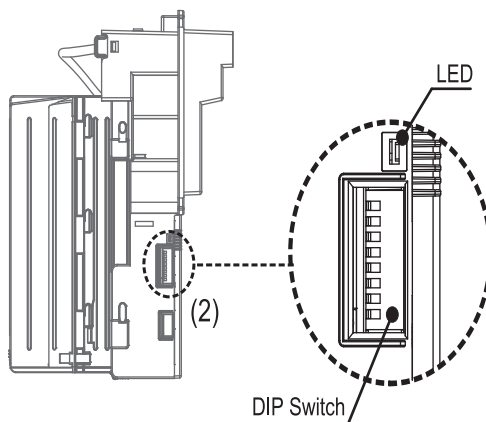


XBA-USD6(Pulse/NISR)

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
	Pulse								
	NISR								
	Inhibit Active HIGH	ON							
★	Inhibit Active LOW	OFF							
	Harness Disable		ON						
★	Harness Enable		OFF						
★	50ms LO / 50ms HI			OFF	OFF				
	60ms LO / 300ms HI			OFF	ON				
	30ms LO / 50ms HI			ON	OFF				
	150ms LO / 150ms HI			ON	ON				
	Reserved					ON			
★	Reserved					OFF			
★	Credit-Pulse Normal HIGH					ON			
★	Credit-Pulse Normal LOW					OFF			
★	Pulse Mode						ON		
	NISR Mode						OFF		
★	1 pulse / USD 1							OFF	OFF
	2 pulses / USD 1							OFF	ON
	4 pulses / USD 1							ON	OFF
	20 pulses / USD 1							ON	ON

★ Manufacture setting

This dip switch is located on the CPU board, remove the CPU board cover first.

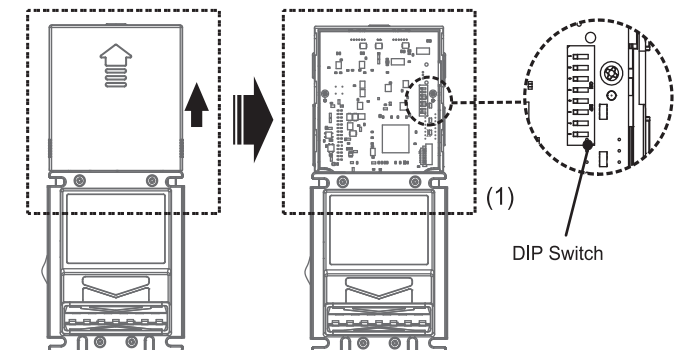

*After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note:1.Turn this dip to with restart the bill acceptor will restore
2.Calibration card is needed.